



FIREPROTECT

# Data Sheet

Fireprotect House  
Factory Road  
Sandycroft  
Deeside  
Flintshire  
CH5 2QJ

Tel:- 01244 536595  
e-mail:- [enquiries@fireprotect.co.uk](mailto:enquiries@fireprotect.co.uk)  
Web:- <http://www.fireprotect.co.uk>

## Superwool Glazing Tape / Gasket ( Black )

Manufacturers & Suppliers of Passive Fire Protection Products

### Construction :-

Superwool Glazing Tape / Gasket (Black) is made from very high quality body soluble fibrous material, which uses long fibers with a low percentage of organic binders. It has excellent thermal insulation properties and is easily cut to size.

Withstanding constant working temperatures of 1000 deg C, its classification temperature is 1200 deg C.

It is ideal for glazing, where you would be able to see the white version through the glass.

### Benefits :-

Is easily wrapped, shaped and cut

Thermal stability up to 1200°C

Excellent flexibility

Low heat storage


Low thermal conductivity

Easily die-cut (please enquire about sheet sizes)

Lightweight

No Health and Safety restrictions

This tape in many instances can be directly substituted in applications where you would have used ceramic tape, but are restricted by Health & Safety legislation.

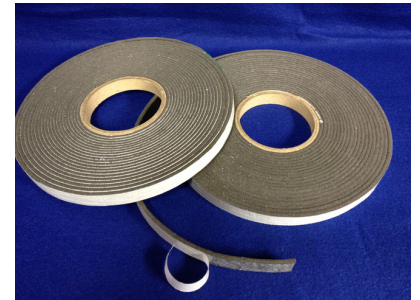

### Other Applications :-

\*\*High Temperature gaskets

\*\*Fire resistant gaskets for metal partitions

\*\* lighting,

\*\* stoves,

\*\* automotive,

\*\* aerospace,

\*\* fire doors,

\*\* curtain walling

and many other applications

The tape is coated one side, with a pressure sensitive adhesive system, identical to FCL tape (white) and the FCL tape ceramic.

Please contact us for roll sizes and quotations.

The Company reserve the right to update this data sheet should any additional information become available. As our products are being used for a variety of applications under different conditions, the Company will not be held responsible for the failure of any product. Whilst all information is provided in good faith, it is up to the customer to test and establish suitability of each product via their own test methods.